



Size Range

92 x 92 x 38 mm
AC AXIAL FAN

3,62 x 3,62 x 1,5 "

TECHNICAL DATA

Characteristics

- Weight: 0,615 Kg / 1,36 Lb
- Housing in ZAMAK
- Impeller in plastic UL 94 V-0
- L-10 life expectancy at 40°C: 80.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -40 / +70°C
- Connection: Terminals
- GAM T1 listed
- Impedance protected
- IP20



Options

- Speed sensor
- Other IP levels
- Flying leads connection
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages

ELECTRICAL AND AERAILIC DATA

| Part Number | Voltage | Frequency | Nb Phases | Airflow | | Pressure | | Nominal speed RPM | Noise level LP dBA | Nominal current mA | Starting current mA | power W | Capacitor µF |
|--------------|---------|-----------|-----------|---------|-------|---------------------|-----------------------|----------------------|-----------------------|-----------------------|------------------------|------------|-----------------|
| | V | Hz | | l/s | CFM | mm H ₂ o | inch H ₂ o | | | | | | |
| 113XN0182000 | 115 | 50 | 1 | 21,00 | 44,52 | 6,70 | 0,26 | 2850 | 36 | 140 | 270 | 10,00 | |
| | 115 | 60 | 1 | 25,00 | 53,00 | 9,00 | 0,35 | 3300 | 41 | 115 | 220 | 9,00 | |
| 113XN0181000 | 220 | 50 | 1 | 21,00 | 44,52 | 6,70 | 0,26 | 2850 | 36 | 85 | 160 | 12,00 | |
| | 220 | 60 | 1 | 25,00 | 53,00 | 9,00 | 0,35 | 3300 | 41 | 75 | 140 | 11,00 | |

DRAWING AND AIRFLOW CURVE

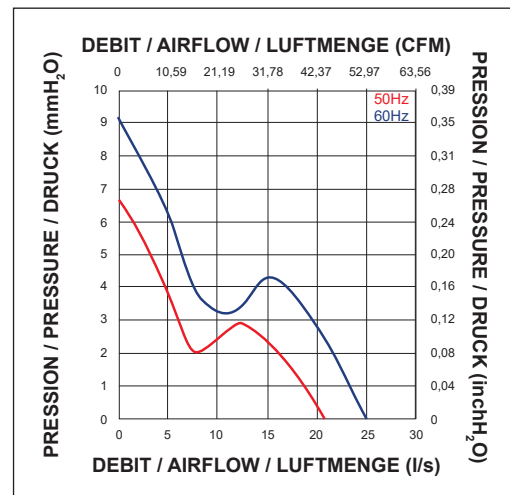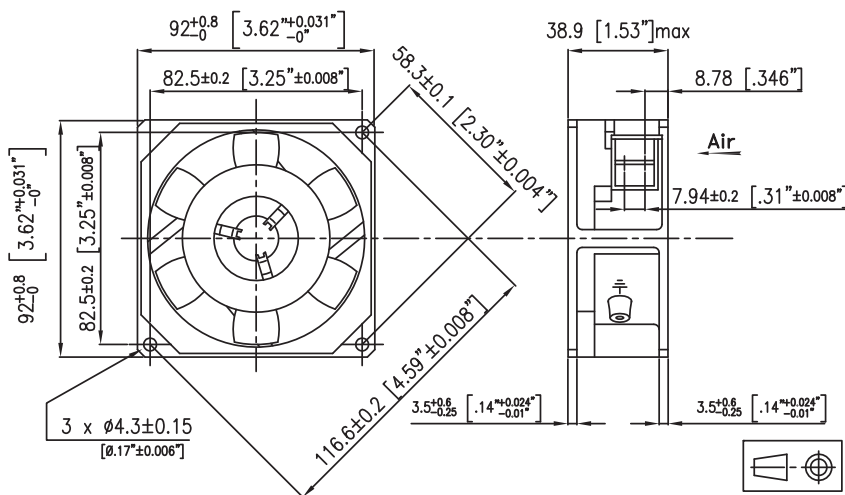

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.