


CHARACTERISTICS

Weight: 0,3 Kg / 0,66 Lb
 Housing in ZAMAK
 Impeller in plastic UL 94 V-0
 L-10 life expectancy at 40°C: 80.000 hours
 Operating temperature range: -10 / +70 °C
 Storage temperature: -40 / +70°C
 Connection: Leads
 Impedance Protected
 IP20

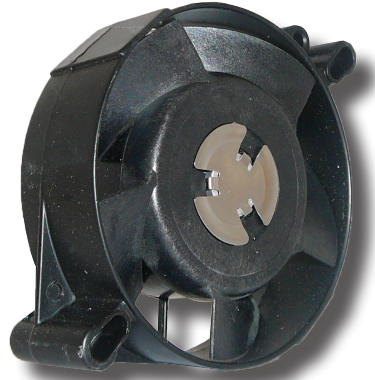

OPTIONS

Other IP levels
 Salt spray protection
 Shocks and vibrations protection
 Marine application
 Wide temperature range
 Other voltages

Part Number	Voltage		Frequency	Nb Phases	Airflow		Pressure		Nominal speed	Noise level LP	Nominal current	Starting current	power	Capacitor
	V	Hz			l/s	CFM	mm H ₂ o	inch H ₂ o						
146DF0182004	115	50	50	1	9,0	19,08	3,3	0,13	2500	26	70	120	6	
	115	60			11,0	23,32	4,8	0,19	3100	32	60	5		

