



Size Range 165 x 181 x 190 mm 6,49 x 7,12 x 7,48 "
AC HIGH PERFORMANCES CENTRIFUGAL FAN

TECHNICAL DATA

Characteristics

- Weight: 3,6 Kg / 7,96 Lb
- Housing in Aluminium
- Turbine in metal
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- IP40



Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch

ELECTRICAL AND AERAILIC DATA

| Part Number | Voltage | Frequency | Nb Phases | Airflow | | Pressure | | Nominal speed RPM | Noise level LP dBA | Nominal current A | Starting current A | power W | Capacitor µF |
|---------------|---------|-----------|-----------|---------|--------|---------------------|-----------------------|-------------------|--------------------|-------------------|--------------------|---------|--------------|
| | V | Hz | | l/s | CFM | mm H ₂ o | inch H ₂ o | | | | | | |
| 609COV016DC13 | 220 | 50 | 3 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,26 | 1,25 | 60,00 | |
| | 380 | 50 | 3 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,15 | 0,75 | 60,00 | |
| | 220 | 60 | 3 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,30 | 1,15 | 88,00 | |
| | 380 | 60 | 3 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,17 | 0,70 | 88,00 | |
| | 220 | 50 | 1 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,29 | 1,10 | 66,00 | 4,70 |
| | 380 | 50 | 1 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,16 | 0,65 | 66,00 | 1,47 |
| | 220 | 60 | 1 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,44 | 1,00 | 97,00 | 4,70 |
| | 380 | 60 | 1 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,25 | 0,60 | 97,00 | 1,47 |
| 609COV116DC13 | 220 | 50 | 3 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,26 | 1,25 | 60,00 | |
| | 380 | 50 | 3 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,15 | 0,75 | 60,00 | |
| | 220 | 60 | 3 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,30 | 1,15 | 88,00 | |
| | 380 | 60 | 3 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,17 | 0,70 | 88,00 | |
| | 220 | 50 | 1 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,29 | 1,10 | 66,00 | 4,70 |
| | 380 | 50 | 1 | 79,00 | 167,48 | 32,00 | 1,26 | 2800 | 65 | 0,16 | 0,65 | 66,00 | 1,47 |
| | 220 | 60 | 1 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,44 | 1,00 | 97,00 | 4,70 |
| | 380 | 60 | 1 | 89,00 | 188,68 | 45,00 | 1,77 | 3200 | 68 | 0,25 | 0,60 | 97,00 | 1,47 |

DRAWING AND AIRFLOW CURVE

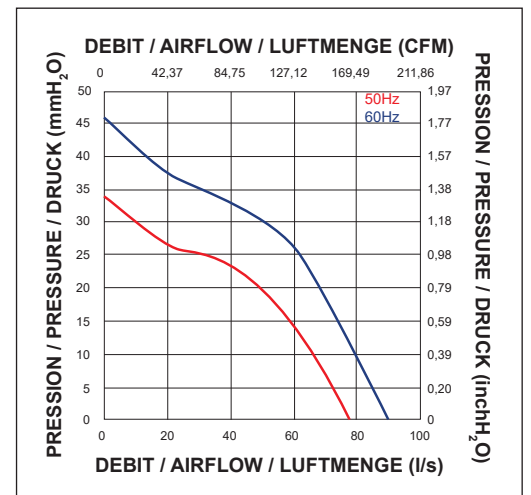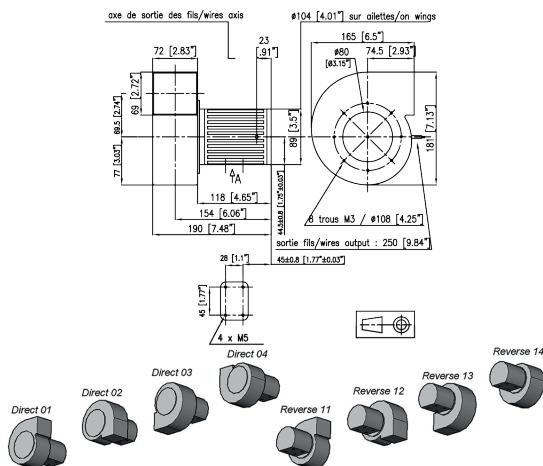

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.