



Size Range 350 x 177 mm 13,77 x 6,97 "  
AC HIGH PERFORMANCES AXIAL FAN

### TECHNICAL DATA

#### Characteristics

- Weight: 13,1 Kg / 28,95 Lb
- Housing in Aluminium
- Impeller in metal
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Terminal box
- IP42



#### Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch
- NATO Codification (not on all part numbers, please consult the factory for more detailed information)

### ELECTRICAL AND AERAILIC DATA

| Part Number | Voltage | Frequency | Nb Phases | Airflow |         | Pressure            |                       | Nominal speed RPM | Noise level LP dBA | Nominal current A | Starting current A | power W | Capacitor µF |
|-------------|---------|-----------|-----------|---------|---------|---------------------|-----------------------|-------------------|--------------------|-------------------|--------------------|---------|--------------|
|             | V       | Hz        |           | l/s     | CFM     | mm H <sub>2</sub> o | inch H <sub>2</sub> o |                   |                    |                   |                    |         |              |
| 60AF026DC13 | 220     | 50        | 3         | 850,00  | 1802,00 | 60,00               | 2,36                  | 2900              | 82                 | 1,70              | 14,00              | 385,00  |              |
|             | 380     | 50        | 3         | 850,00  | 1802,00 | 60,00               | 2,36                  |                   |                    |                   |                    |         |              |
|             | 220     | 60        | 3         | 975,00  | 2067,00 | 78,00               | 3,07                  |                   |                    |                   |                    |         |              |
|             | 380     | 60        | 3         | 975,00  | 2067,00 | 78,00               | 3,07                  |                   |                    |                   |                    |         |              |
| 60AG0266C13 | 127     | 50        | 1         | 850,00  | 1802,00 | 60,00               | 2,36                  | 2900              | 82                 | 4,45              | 25,00              | 445,00  | 44,70        |
|             | 127     | 60        | 1         | 975,00  | 2067,00 | 78,00               | 3,07                  |                   |                    |                   |                    |         |              |
| 60AG0261C13 | 220     | 50        | 1         | 850,00  | 1802,00 | 60,00               | 2,36                  | 2900              | 82                 | 2,55              | 14,50              | 445,00  | 14,70        |
|             | 220     | 60        | 1         | 975,00  | 2067,00 | 78,00               | 3,07                  |                   |                    |                   |                    |         |              |

### DRAWING AND AIRFLOW CURVE

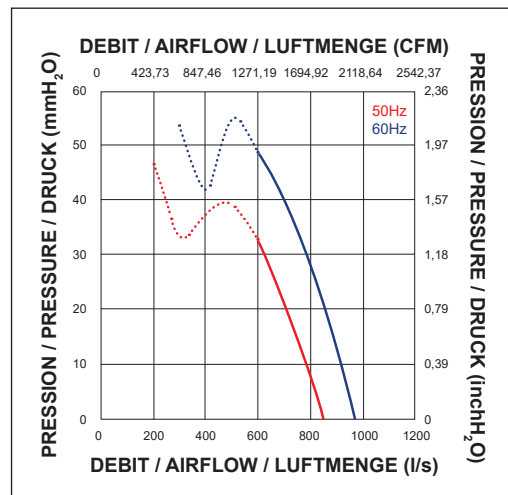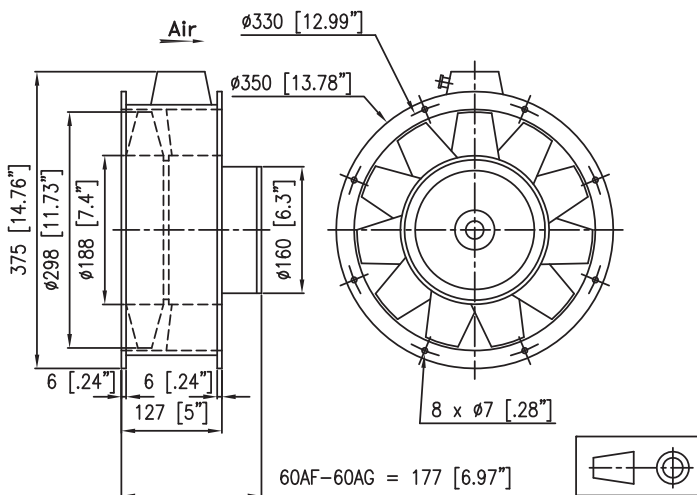

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.