



Size Range 162 x 175,5 x 145 mm 6,38 x 6,91 x 5,71 " AC HIGH PERFORMANCES CENTRIFUGAL FAN

TECHNICAL DATA

Characteristics

- Weight: 2,3 Kg / 5,08 Lb
- Housing in Aluminium
- Turbine in plastic
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- IP40



Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch

ELECTRICAL AND AERAILIC DATA

Part Number	Voltage	Frequency	Nb Phases	Airflow		Pressure		Nominal speed RPM	Noise level LP dBA	Nominal current A	Starting current A	power W	Capacitor μF
	V	Hz		l/s	CFM	mm H ₂ o	inch H ₂ o						
621CAU016DC13	220	50	3	35,00	74,20	33,00	1,30	2800	57	0,12	0,36	25,00	
	380	50	3	35,00	74,20	33,00	1,30	2800	57	0,07	0,21	25,00	
	220	60	3	40,00	84,80	46,00	1,81	3200	61	0,11	0,33	30,00	
	380	60	3	40,00	84,80	46,00	1,81	3200	61	0,07	0,19	30,00	
	220	50	1	35,00	74,20	33,00	1,30	2800	57	0,13	0,31	24,00	1,47
	380	50	1	35,00	74,20	33,00	1,30	2800	57	0,08	0,18	24,00	0,47
	220	60	1	40,00	84,80	46,00	1,81	3200	61	0,15	0,29	31,00	1,47
	380	60	1	40,00	84,80	46,00	1,81	3200	61	0,09	0,17	31,00	0,47
621CAU116DC13	220	50	3	35,00	74,20	33,00	1,30	2800	57	0,12	0,36	25,00	
	380	50	3	35,00	74,20	33,00	1,30	2800	57	0,07	0,21	25,00	
	220	60	3	40,00	84,80	46,00	1,81	3200	61	0,11	0,33	30,00	
	380	60	3	40,00	84,80	46,00	1,81	3200	61	0,07	0,19	30,00	
	220	50	1	35,00	74,20	33,00	1,30	2800	57	0,13	0,31	24,00	1,47
	380	50	1	35,00	74,20	33,00	1,30	2800	57	0,08	0,18	24,00	0,47
	220	60	1	40,00	84,80	46,00	1,81	3200	61	0,15	0,29	31,00	1,47
	380	60	1	40,00	84,80	46,00	1,81	3200	61	0,09	0,17	31,00	0,47

DRAWING AND AIRFLOW CURVE

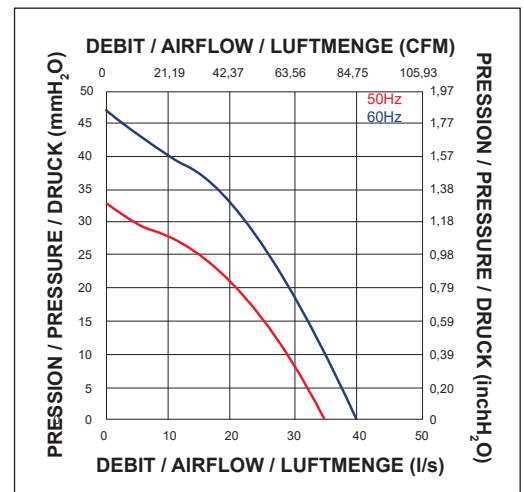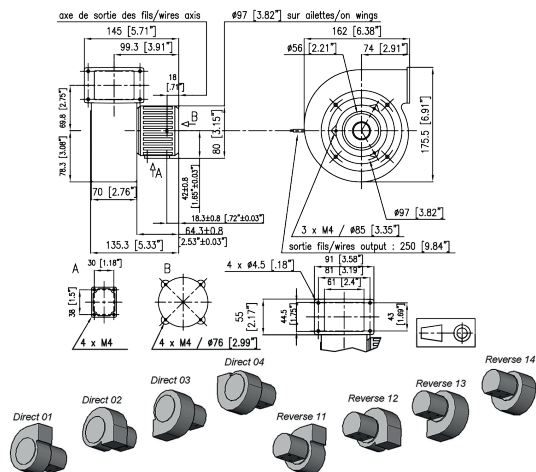

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.