**Technical data sheet**

**Updated on 11/05/23**

# ETRI®

## Serie 692CCP

Size 269 x 318 x 118 mm 10,59 x 12,51 x 4,64 "

Range AC HIGH PERFORMANCES CENTRIFUGAL FAN

## TECHNICAL DATA

### Characteristics

- Weight: 4,75 Kg / 10,5 Lb
- Housing in Aluminium
- Turbine in plastic
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- IP40

### Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch

## ELECTRICAL AND AERAULIC DATA

| Part Number | Voltage | Frequency | Nb Phases | Airflow | | Pressure | | Nominal speed | Noise level LP | Nominal current | Starting current | power | Capacitor |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | Hz | | l/s | CFM | mm $H_2O$ | inch $H_2O$ | RPM | dBA | A | A | W | µF |
| 692CCP016DC13 | 220 | 50 | 3 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,35 | 1,75 | 67,00 | |
| | 380 | 50 | 3 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,20 | 1,00 | 67,00 | |
| | 220 | 60 | 3 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,31 | 1,65 | 88,00 | |
| | 380 | 60 | 3 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,18 | 0,95 | 88,00 | |
| | 220 | 50 | 1 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,35 | 1,50 | 65,00 | 4,70 |
| | 380 | 50 | 1 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,20 | 0,90 | 65,00 | 1,47 |
| | 220 | 60 | 1 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,42 | 1,40 | 92,00 | 4,70 |
| | 380 | 60 | 1 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,24 | 0,80 | 92,00 | 1,47 |
| 692CCP116DC13 | 220 | 50 | 3 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,35 | 1,75 | 67,00 | |
| | 380 | 50 | 3 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,20 | 1,00 | 67,00 | |
| | 220 | 60 | 3 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,31 | 1,65 | 88,00 | |
| | 380 | 60 | 3 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,18 | 0,95 | 88,00 | |
| | 220 | 50 | 1 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,35 | 1,50 | 65,00 | 4,70 |
| | 380 | 50 | 1 | 38,00 | 80,56 | 64,00 | 2,52 | 2850 | 68 | 0,20 | 0,90 | 65,00 | 1,47 |
| | 220 | 60 | 1 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,42 | 1,40 | 92,00 | 4,70 |
| | 380 | 60 | 1 | 44,00 | 93,28 | 90,00 | 3,54 | 3350 | 73 | 0,24 | 0,80 | 92,00 | 1,47 |

## DRAWING AND AIRFLOW CURVE

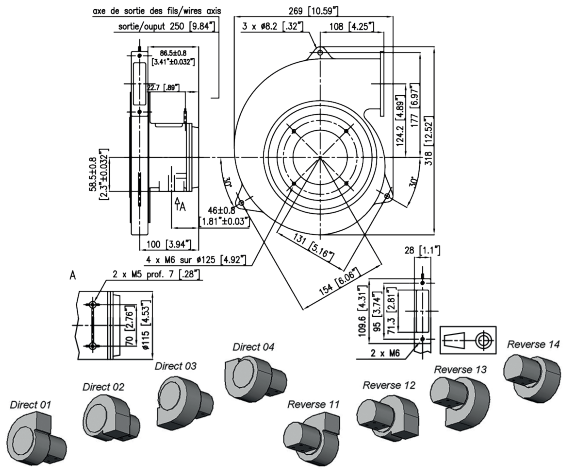


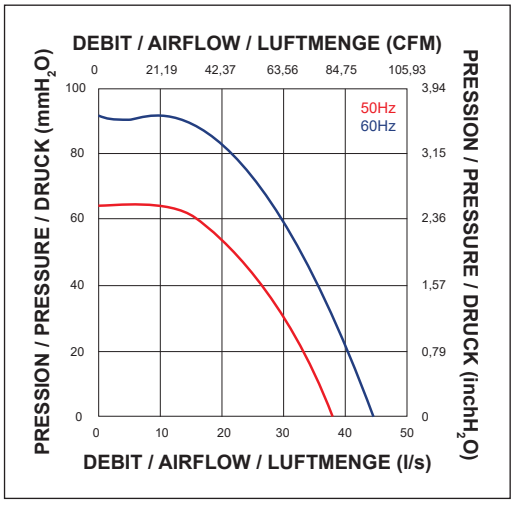


*Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.*