



Size Range 302 x 334 x 298 mm 11,89 x 13,14 x 11,73 "
AC HIGH PERFORMANCES CENTRIFUGAL FAN

TECHNICAL DATA

Characteristics

- Weight: 19 Kg / 41,99 Lb
- Housing in Aluminium
- Turbine in metal
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -54 / +85°C
- Connection: Leads
- GAM T1 listed
- IP20



Options

- Speed sensor
- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- Safety switch

ELECTRICAL AND AERAULIC DATA

| Part Number | Voltage | Frequency | Nb Phases | Airflow | | Pressure | | Nominal speed | Noise level LP | Nominal current | Starting current | power | Capacitor |
|---------------|---------|-----------|-----------|---------|--------|---------------------|-----------------------|---------------|----------------|-----------------|------------------|---------|-----------|
| | | | | l/s | CFM | mm H ₂ o | inch H ₂ o | | | | | | |
| 711CHB016DC13 | 220 | 50 | 3 | 370,00 | 784,40 | 135,00 | 5,31 | 2850 | 79 | 3,00 | 17,00 | 1000,00 | |
| | 380 | 50 | 3 | 370,00 | 784,40 | 135,00 | 5,31 | 2850 | 79 | 1,75 | 10,00 | 1000,00 | |
| | 220 | 60 | 3 | 420,00 | 890,40 | 190,00 | 7,48 | 3200 | 82 | 4,30 | 16,00 | 1550,00 | |
| | 380 | 60 | 3 | 420,00 | 890,40 | 190,00 | 7,48 | 3200 | 82 | 2,50 | 9,50 | 1550,00 | |
| 711CHB116DC13 | 220 | 50 | 3 | 370,00 | 784,40 | 135,00 | 5,31 | 2850 | 79 | 3,00 | 17,00 | 1000,00 | |
| | 380 | 50 | 3 | 370,00 | 784,40 | 135,00 | 5,31 | 2850 | 79 | 1,75 | 10,00 | 1000,00 | |
| | 220 | 60 | 3 | 420,00 | 890,40 | 190,00 | 7,48 | 3200 | 82 | 4,30 | 16,00 | 1550,00 | |
| | 380 | 60 | 3 | 420,00 | 890,40 | 190,00 | 7,48 | 3200 | 82 | 2,50 | 9,50 | 1550,00 | |

DRAWING AND AIRFLOW CURVE

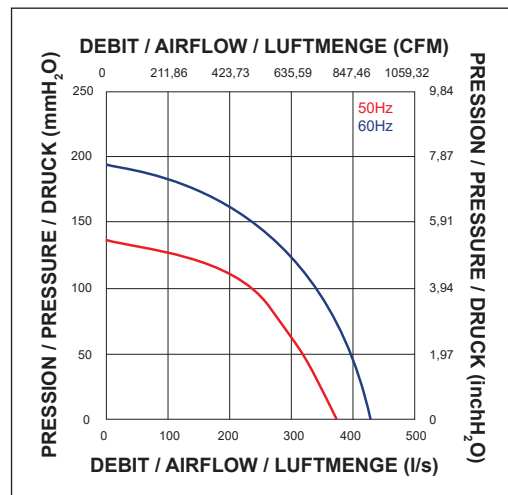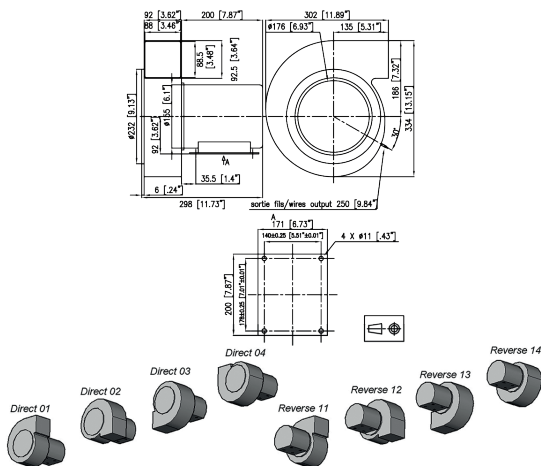

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.