



Size Range 290 x 76,5 mm 11,41 x 3,01 " AC HIGH PERFORMANCES AXIAL FAN

TECHNICAL DATA

Characteristics

- Weight: 2,9 Kg/6,41 Lb
- Housing in Aluminium
- Impeller in plastic
- L-10 life expectancy at 40°C: 25.000 hours
- Operating temperature range:
 - 10/+55°C for 75GF and 75GK
 - 10/+70°C for 75GZ
- Storage temperature range:
 - 40/+70°C for 75GF and 75GK
 - 54/+85°C for 75GZ
- Connection: Leads
- IP41



Options

- Other IP levels
- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- NATO Codification (not on all part numbers, please consult the factory for more detailed information)

ELECTRICAL AND AERAILIC DATA

Part Number	Voltage	Frequency	Nb Phases	Airflow		Pressure		Nominal speed RPM	Noise level LP dBA	Nominal current A	Starting current A	power W	Capacitor μ F
	V	Hz		l/s	CFM	mm H ₂ o	inch H ₂ o						
75GF026AC11	110	50	1	220,00	466,40	2,70	0,11	1100	56	0,37	0,47	28,00	
	220	50	1	220,00	466,40	2,70	0,11	1100	56	0,19		28,00	
75GK026AC11	110	50	1	275,00	583,00	6,40	0,25	1350	54	0,61	1,15	41,00	
	220	50	1	275,00	583,00	6,40	0,25	1350	54	0,31	0,58	41,00	
75GZ026DC13	220	50	3	290,00	614,80	7,50	0,30	1400	55	0,16	0,39	38,00	
	380	50	3	290,00	614,80	7,50	0,30	1400	55	0,09	0,23	38,00	
	220	60	3	330,00	699,60	8,90	0,35	1600	58	0,15	0,36	40,00	
	380	60	3	330,00	699,60	8,90	0,35	1600	58	0,09	0,21	40,00	
	220	50	1	290,00	614,80	7,40	0,29	1400	55	0,17	0,33	34,00	2,20
	380	50	1	290,00	614,80	7,40	0,29	1400	55	0,10	0,20	34,00	0,69
	220	60	1	320,00	678,40	5,80	0,23	1600	58	0,21	0,32	42,00	2,20
	380	60	1	320,00	678,40	5,80	0,23	1600	58	0,13	0,19	42,00	0,69

DRAWING AND AIRFLOW CURVE

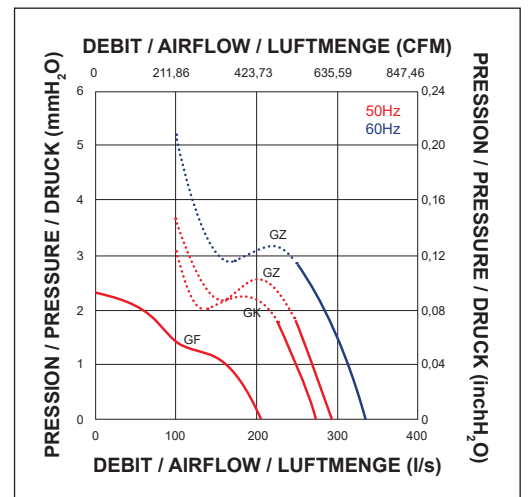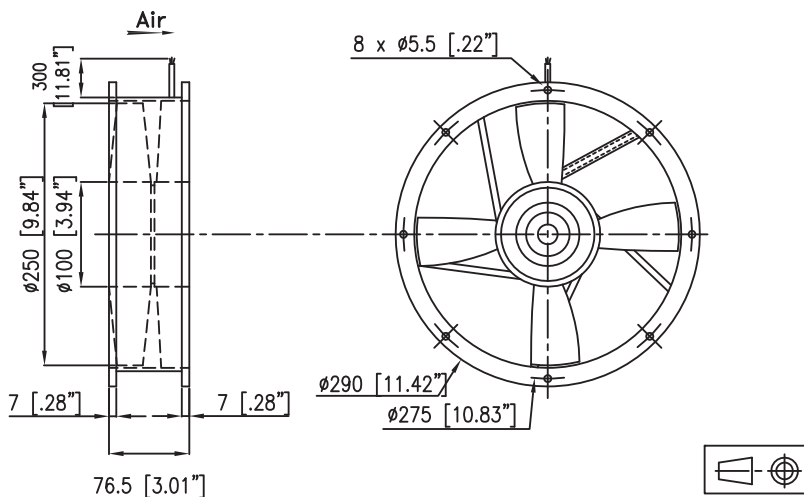

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.