Technical data sheet
Updated on 12/05/23

ETRI®

Serie 110VU

Non RoHS

Size	88 x 88 x 25 mm	3,46 x 3,46 x 1 "
Range	400Hz AXIAL FAN	

TECHNICAL DATA

Characteristics

- Weight: 0,2 Kg / 0,44 Lb
- Housing in Aluminium
- Impeller in plastic
- L-10 life expectancy at 40°C: 35.000 hours
- Operating temperature range: -10 / +70 °C
- Storage temperature: -40 / +70°C
- Connection: Leads
- GAM T1 listed
- IP20

Options

- Salt spray protection
- Shocks and vibrations protection
- Marine application
- Wide temperature range
- Other voltages
- NATO Codification (not on all part numbers, please consult the factory for more detailed information)

ELECTRICAL AND AERAULIC DATA

Part Number	Voltage	Frequency	Nb Phases	Airflow		Pressure		Nominal speed	Noise level LP	Nominal current	Starting current	power	Capacitor
	V	Hz		l/s	CFM	mm H_2O	inch H_2O	RPM	dBA	A	A	W	µF
110VU0162001 NR	115	400	1	25,90	54,91	8,70	0,34	3740	43	0,14	0,14	14,50	0,47
110VU0160001 NR	200	400	1	25,90	54,91	8,70	0,34	3740	43	0,08	0,08	14,50	0,15

DRAWING AND AIRFLOW CURVE

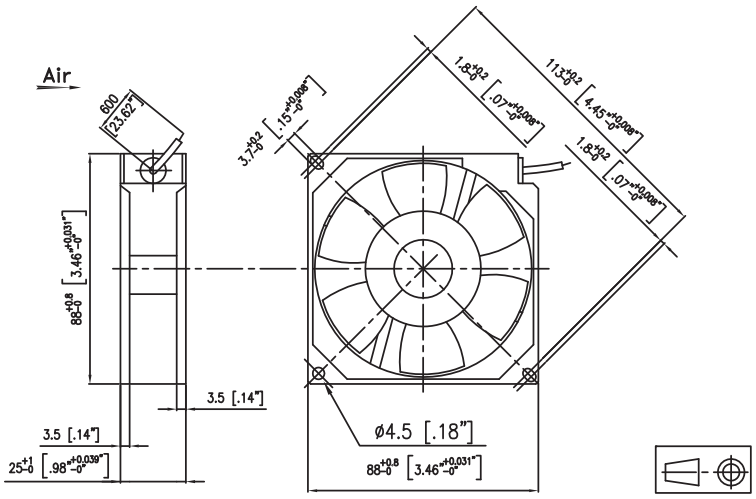

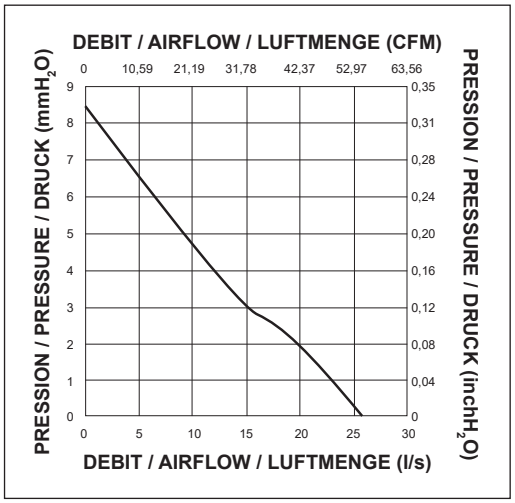

Non contractual document. All specifications are subject to change without prior notice. For professional use only. Please refer to the conditions of use of our catalogue.